



# Wheel Order Form

Date: \_\_\_\_\_

Customer: \_\_\_\_\_

Contact: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

Quantity: \_\_\_\_\_

Make: \_\_\_\_\_

Model & Serial: \_\_\_\_\_

Wheel Part: \_\_\_\_\_

Position (Drive/Steer): \_\_\_\_\_


Tire Size: \_\_\_\_\_

Rim Width (WD): \_\_\_\_\_

### Chamfer Type (Check all that apply)

- Conical 90 Deg.     1 Side
- Conical 60 Deg.     2 Sides
- Spherical             None
- Straight

\*See Diagram Below

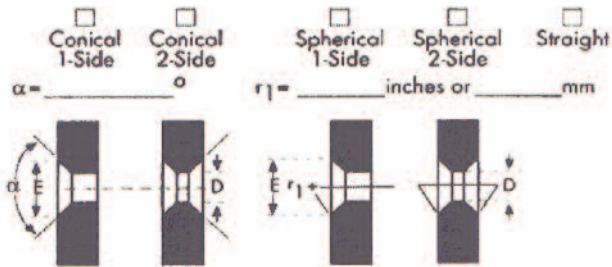

### Plate Thickness (CDT)

- 3/8" [9.5mm]     1/2" [12.7mm]
- Other \_\_\_\_\_


### Wheel Type

- Lock Ring Wheel             Drop Center
- Split Wheel                     Dual
- Other \_\_\_\_\_

Number of Holes: \_\_\_\_\_

	[mm]	[in]
Pilot Hole Diameter (PHD)	_____	_____
Bolt Hole Circle Diameter (BCD)	_____	_____
Bolt Hole Diameter (BHD)	_____	_____
Chamfer Diameter (CD)	_____	_____
OEM Offset/Back Spacing (G)	_____	_____
Aftermarket Offset/Back Spacing (H)	_____	_____
Dome Height (Dual Only)	_____	_____

\*See Diagram Below

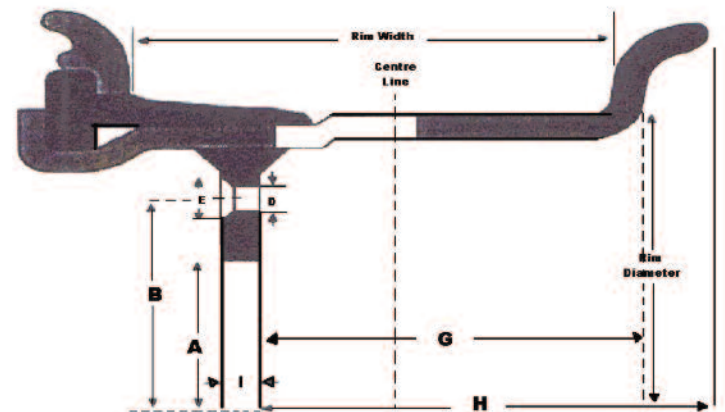

### Special Instructions: \_\_\_\_\_

---



---



---



---



---